


## FOC Media Converter



## Features:

- Support the switch between 100Base-TX and 100Base-FX
- 1\*155Mbps full-duplex fiber port and 1\*100M Ethernet port
- Each port has the complete LED Indicator light for installation, commissioning and maintenance
- Support 9K Jumbo Packet
- Support direct forwarding mode, less time delay
- Less power consumption, only 1.5W in full load condition
- Support isolation protection function, good data security
- Small size, suitable for installation in various places
- Adopt low power consumption chips to ensure longtime and stable operation.

## Dimensions:

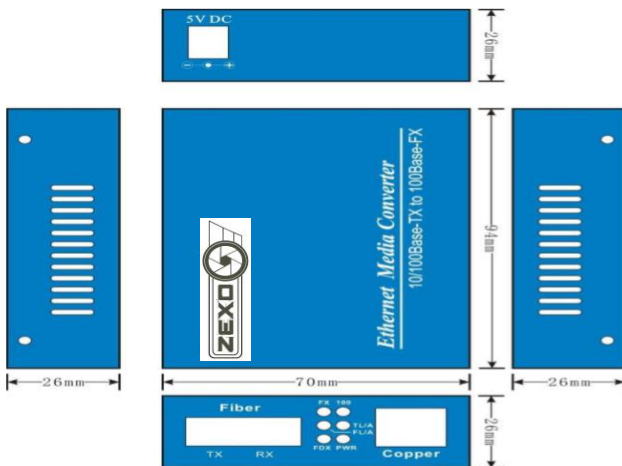

Model No.	FO100120-MC	
Standards	IEEE802.3 10Base-T IEEE802.3u 100Base-TX/FX IEEE802.3ab 1000Base-T IEEE802.3z 1000Base-SX/LX	IEEE802.3x Flow control IEEE802.1p QoS IEEE802.1d Spanning Tree IEEE802.1q VLAN
Certifications	CCC, CE, FCC, RoHS	
Ethernet Port	Connector: RJ45 Data Rate: 10/100/1000M Distance: 100m UTP Type: UTP-5E or higher level	
Fiber Port	Connector: SC/FC/ST/SFP slot Data Rate: 1.25Gbps Distance: 550m~20km	
Performance	Processing Type: Store and Forward MAC Table Size: 2K Buffer Space: 1Mbit Maximum packet length: 9K Back bandwidth: 4G Time Delay: <20μs	
Power	Power type: external power supply Input Voltage: AC100V~240V 50/60Hz Connector: DC Socket Working Voltage: 5V Power Consumption: 0.75W~3W	
Environment	Storage Temperature: -40~70°C Operating Temperature: -10~55°C Relative Humidity: 5-95% ( no condensation)	
Physical Characteristics	Dimension: 94×70×26mm(external),140×110×29mm(internal) Weight: 0.35kg(internal),0.35kg(external) Color: Metal, Black	
Warranty	1 Year	