




H.265/H.265+ 8 CH NVR



Feature

- ❖ Support HDMI 5MP output VGA HD output;
- ❖ Support ONVIF;access third party;
- ❖ Support web, CMS, center platform management software XpiaEYE.
- ❖ Support multiple cloud technology, network penetration, alarm
- ❖ information pushed to your phone and other functions;
- ❖ Support multiple network services (support DHCP, FTP, DNS, DDNS, NTP,
- ❖ UPNP, EMAIL, IP searches, Alarm Center, etc.)

Dimensions:

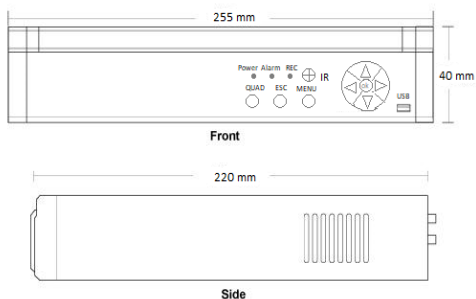

Model	XP-NV6509-1HDD	
System	Main Processor	HI3520
	Operating System	Embedded Linux
	System resources	Simultaneous multi-channel real-time recording, playback, network operation, USB backup
Interface	operator interface	16-bit true color graphic menu operation interface, support mouse operation
	Preview	1/4/9
video	Video input (IP)	4*5M / 9*4M
	Access Bandwidth	64Mbps
	Forwarding Bandwidth	36Mbps
	Video Compression	H.264 / H.265/H.265+
	Display quality	Max 1920*1080
	Playback Quality	1080P
	Decode	1*5M / 1*4M
	VR	Unsupport
Audio	Audio Compression	G.711A
	Intercom	Unsupport
Record & playback	Recording mode	Manual>Alarm>Dynamic Detection>timing
	Local Playback	1*5M/ 1*4M
	Search mode	Search by Time/Calendar/Event/Channel
	Record Storage	HDD, Network
	Backup mode	Network backup, USB hard disc, USB burner, SATA burner
External interface	Video output	1ch VGA, 1ch HDML HD output
	Audio I/O	0/1
	Alarm I/O	0/0
	Network interface	1*RJ45 10M / 100M Adaptive Ethernet Port
	USB Interface	2*USB 2.0 Ports
	HDD	1*SATA (Up to 8TB for each disk)
	ESATA	No
General	Serial interface	No
	ONVIF	Support
	Power supply	12V/3A
	Power Consumption	<10W(Without HDD)
	Work environment	Temperature:0°C —55°C , Humidity:10%—90%RH , Atm:86kpa —106kp
	Dimension	220mm*255mm*40mm (L*W*H)
	Weight	Approx 1.5 kg